



Aesthetics
distribution box

美学配电箱

“智慧居家”

我是您的配电小涑

智联未来

涑伊尔智能家居配电强大的系统研发
以及前瞻性的产品工业设计。

让您看见未来的样子...



"Smart home"
I'm your power
distributor



Smart Link to the Future
LYE smart home distribution powerful system
research and development
And forward-looking product industrial design
Let you see the future

Beginning with the future Electricity Wisdom

始于对未来的 电力智慧



涑伊尔科技（浙江）股份有限公司是一家位于浙江温州的国家高新技术企业，专注于智慧配电箱、弱电箱、高低压柜的研发、生产与销售。公司以打造高品质、智能化配电设备为核心，致力于为客户提供安全、可靠的电力解决方案。

作为中国智能配电箱十大品牌及国家标准起草单位，涑伊尔拥有多项专利技术，产品通过ISO9001、ISO14001、OHSAS18001、CCC、CE、TUV等多项国内外权威认证，品质达国际先进水平。

公司已成为世界500强及行业龙头企业的优选供应商，市场占有率与客户满意度持续提升。涑伊尔以“成为中国智能电箱领导者”为愿景，秉持“合作、共享、利他、成长”的价值观，持续推动产品智能化与技术革新。

未来，涑伊尔将持续加大研发投入，积极拓展海内外市场，不断提升产品与服务，实现可持续高质量发展。



愿景Vision:

致力于成为中国电气机柜领域引领者
Dedicated to becoming a leader in China's electrical cabinet industry

使命Mission:

让电更安全、更智能
Make electricity safer and smarter

价值观Values:

合作、共享、利他、成长
Cooperation, sharing, altruism, growth

LYE Technology (Zhejiang) Co., Ltd. is a national high-tech enterprise located in Wenzhou, Zhejiang Province, specializing in the R&D, production and sales of smart power distribution boxes, low-voltage distribution boxes, and high-low voltage cabinets. With the core goal of creating high-quality and intelligent power distribution equipment, the company is committed to providing customers with safe and reliable power solutions.

As one of the Top 10 Brands of China's Smart Power Distribution Boxes and a drafter of national standards, LYE holds a number of patented technologies. Its products have obtained multiple authoritative certifications at home and abroad, including ISO9001, ISO14001, OHSAS18001, CCC, CE, and TUV, and their quality has reached the international advanced level.

The company has become a preferred supplier for Fortune Global 500 companies and industry leaders, with its market share and customer satisfaction continuing to rise. LYE takes "becoming a leader in China's smart power distribution boxes" as its vision and adheres to the values of "Cooperation, Sharing, Altruism, and Growth" to continuously promote product intelligence and technological innovation.

In the future, LYE will continue to increase R&D investment, actively expand domestic and overseas markets, constantly improve its products and services, and achieve sustainable and high-quality development.

智能制造加工中心

智能加工中心引进了德国通快技术的钣金智能柔性加工生产线、智能数控冲床分拣中心、ABB机器人智能折弯中心、ABB机器人激光焊接中心、智能激光切割分拣中心、RGV智能成套装配生产线、智能母排数控中心、MES系统等先进的工艺流程及检测设备。



▲ 智能母排数控中心



▲ ABB机器人激光焊接中心



▲ 智能柔性加工生产线



▲ RGV智能成套装配生产线



▲ 机器人智能折弯中心



▲ 数控折弯机

Intelligent manufacturing processing center

The Intelligent Processing Centre has introduced advanced processes and testing equipment such as intelligent flexible processing production line for sheet metal, intelligent CNC punching sorting centre, ABB robot laser welding centre, intelligent laser cutting sorting centre, RGV intelligent complete assembly production line, intelligent CNC centre for busbars and MES system, etc., which are based on the technology of Germany Tongxu.



▲ 智能激光切割分拣中心



▲ 雷电冲击试验装置



▲ 局放电磁屏蔽室



▲ 无局放耐压试验装置



▲ 全自动热缩加工中心



▲ 全自动二次线加工中心

INNOVATION LEADS THE FUTURE

创新引领未来



The company has passed the certification of ISO 9001 quality management system, ISO 14001 environmental management system and ISO 45001 Occupational health and safety management system, and its core products have obtained the National Grid standard certification and EU CE and other international qualifications. Its independent research and development of submerged liquid cooling charging pile technology (energy efficiency of 97.6%) has 1 invention patent and a number of utility model patents, and cooperation with "Jingong Electric" to achieve market breakthroughs, to solve the pain points of the supercharge industry.



公司通过ISO 9001质量管理体系、ISO 14001环境管理体系及ISO 45001职业健康安全管理体系认证，核心产品获国家电网标准认证及欧盟CE等国际资质。其自主研发的浸没液冷充电桩技术（能效达97.6%）拥有16项发明专利及多项实用新型专利，并与“京工电”合作实现市场化突破，解决了超充堆行业痛点。





Use art to
make life better,
LYE gives
"new value"

用艺术让生活变的更美好
涑伊尔赋予 “新价值”



Aesthetics distribution box



美学配电箱



住宅配电箱系列

Aesthetics distribution box

01 LYB1	19 LYM5
03 LYB2	21 LYC1
05 LYB4(PZ30)	23 LYC2
07 LYB5	25 LYC3
09 LYB6	27 LYC4
11 LYB8	29 LYC5
13 LYB9	31 LYD1
15 LYM1	33 LYD2
17 LYM3	35 LYD5

多媒体信息箱系列

Multimedia information box series

37 LYX1-01
39 LYX1-02
41 LYX1-03
43 LYX1-06
45 LYX1-08
47 LYX2-08
49 LYX1-09

金属箱体等电位配电箱系列

Metal enclosure equipotential box series

51 TD28等电位

面板型Wi-Fi无线路由器系列

Panel type Wi-Fi wireless router series

53 LYW-AP101

光纤箱模块系列

Optical fiber box module series

56 LYX-B301~302	58 LYX-E301
LYX-B307~308	LYX-G301~302
57 LYX-A301	LYX-FS1
LYX-A304	LYP1-020
LYX-B305	
LYX-C301~303	

LYB1涑雅

金属箱体住宅配电箱

符合现代美学的样式，涑伊尔电气为能提供时尚和流线型家用产品感到自豪。在LYB1涑雅系列设计之初，最早要求就是要有一个优雅洁净的设计；这已经不是简单的功能和使用上的满足，而是升华至具有装饰作用，使其能够和各种房屋内部环境完美的融合。

LYB1涑雅系列的宽度和高度与一台笔记本电脑相仿，与新锐精英的居家其它产品一样，拥有相同特征的流畅简约外观。



Metal Enclosure Residential Distribution Box

With a style that conforms to modern aesthetics, LYE takes pride in providing stylish and streamlined household products. At the very beginning of designing the LYB1 Laiya Series, the primary requirement was to create an elegant and clean design. This goes beyond merely meeting functional and usability needs; it has been elevated to serve a decorative purpose, allowing it to perfectly integrate with various interior environments of houses.

The width and height of the LYB1 Laiya Series are similar to those of a laptop. Just like other home products owned by emerging elites, it features a smooth and minimalist appearance with the same characteristics.

塑料盖板金属箱体的配电箱:

- ◎ 配电系统建筑电气配电系统的电器安装,配套以及房屋改造装修等方面。
- ◎ 采用ABS阻燃面板, 喷塑冷轧钢板箱体。
- ◎ 面板全白设计, 简约又大气, 喷塑箱体结实耐用防腐蚀。
- ◎ 箱体厚度0.8mm/1.0mm/1.2mm可选。
- ◎ 标准配置: 面板、零地排组件(上零下地)、导轨(1.0mm)、箱体。
- ◎ 可搭配断路器。

Distribution Box with Plastic Cover and Metal Enclosure:


- ◎ Suitable for electrical installation, supporting facilities of power distribution systems in building electrical engineering, as well as house renovation and decoration.
- ◎ Adopts ABS flame-retardant panel and spray-painted cold-rolled steel sheet enclosure.
- ◎ The panel features an all-white design, which is simple and elegant, while the spray-painted enclosure is sturdy, durable and corrosion-resistant.
- ◎ Enclosure thickness options: 0.8mm/1.0mm/1.2mm.
- ◎ Standard configuration: Panel, neutral and ground busbar assembly (neutral on top, ground at the bottom), guide rail (1.0mm), enclosure.
- ◎ Can be equipped with circuit breakers.

暗装尺寸规格 Recessed Installation Dimension Specifications

产品型号	排数	外形尺寸	底盒尺寸
Model	Rows	Overall Dimensions	Bottom box Dimensions
LYB1-9	1	240×200×105	217×180×85
LYB1-12	1	295×200×105	270×180×85
LYB1-16	1	366×240×105	340×220×85
LYB1-20	1	438×240×105	412×220×85
LYB1-24	2	295×400×105	268×380×85
LYB1-32	2	366×480×105	340×460×85
LYB1-40	2	438×480×105	412×460×85
LYB1-48	3	366×720×105	340×700×85
LYB1-60	3	438×720×105	412×700×85

明装尺寸规格 Surface Installation Dimension Specifications

产品型号	排数	外形尺寸	底盒尺寸
Model	Rows	Overall Dimensions	Bottom box Dimensions
LYB1-9	1	240×200×105	240×200×85
LYB1-12	1	295×200×105	295×200×85
LYB1-16	1	366×240×105	366×240×85
LYB1-20	1	438×240×105	438×240×85
LYB1-24	2	295×400×105	295×400×85
LYB1-32	2	366×480×105	366×480×85
LYB1-40	2	438×480×105	438×480×85
LYB1-48	3	366×720×105	366×720×85
LYB1-60	3	438×720×105	438×720×85



LYB2- 视界

玻璃面板智能照明箱

为每一处细节注入灵魂，深伊尔创新大平面玻璃面板信息箱；艺术家的澎湃激情之作，致力于再现纯粹的质感结合前沿科技，在自然中吸取灵感，让每一眼定格，享受精彩纷呈的温馨生活。

Smart Lighting Box with Glass Panel

We infuse soul into every detail - LYE's innovative large-flat glass panel information box. A masterpiece born from the passionate inspiration of artists, it is committed to recreating pure texture combined with cutting-edge technology. Drawing inspiration from nature, it freezes every beautiful glance, allowing you to enjoy a wonderful and warm life.



玻璃面盖金属箱体的配电箱：

- ◎ 配电系统建筑电气配电系统的电器安装、配套以及房屋改造装修等方面。
- ◎ 采用钢化玻璃面板，喷漆冷轧钢板箱体。
- ◎ 钢化玻璃面板搭配铝框设计，防刮易清洁，箱体结实耐用防腐性。
- ◎ 箱体厚度0.8mm/1.0mm/1.2mm可选。
- ◎ 皓月白、星空灰、深海蓝、土豪金多色可选，也可定制其他颜色。
- ◎ 标准配置：玻璃面板、铝框、零地排组件（上零下地）、导轨（1.0mm）、箱体。
- ◎ 可搭配断路器。

Distribution Box with Glass Cover and Metal Enclosure:

◎ Suitable for electrical installation and supporting facilities of power distribution systems in building electrical engineering, as well as house renovation and decoration.

◎ Adopts tempered glass panel and spray-painted cold-rolled steel sheet enclosure.

◎ The tempered glass panel is paired with an aluminum frame design, featuring scratch resistance and easy cleaning; the enclosure is sturdy, durable and corrosion-resistant.



◎ Enclosure thickness options: 0.8mm/1.0mm/1.2mm.

◎ Multiple color options available: Bright Moon White, Starry Sky Gray, Deep Sea Blue, Luxury Gold; other colors can also be customized.

◎ Standard configuration: Glass panel, aluminum frame, neutral and ground busbar assembly (neutral on top, ground at the bottom), guide rail (1.0mm), enclosure.

◎ Can be equipped with circuit breakers.

产品型号	排数	外形尺寸	底盒尺寸
Model	Rows	Overall Dimensions	Bottom box Dimensions
LYB2-12	1	298×270×107	268×250×90
LYB2-16	1	370×270×107	340×250×90
LYB2-20	1	442×270×107	412×250×90
LYB2-24/1	1	514×270×107	484×250×90
LYB2-24/2	2	298×470×107	268×450×90
LYB2-32	2	370×470×107	340×450×90
LYB2-40	2	442×470×107	412×450×90
LYB2-48	3	370×670×107	340×650×90
LYB2-60	3	442×670×107	412×650×90
LYB2-72	3	514×670×107	484×650×90





LYB4 (PZ30)系列

金属箱体住宅配电箱

PZ30模数化终端组合电器是一种安装终端电器的装置，它的主要特点是采用电器尺寸模数化、安装轨道化、外形艺术化、使用安全化，在国内外已被广泛应用。

Metal Enclosure Residential Distribution Box

The PZ30 modular terminal combined electrical appliance is a device used for installing terminal electrical appliances. Its main features include modularized electrical appliance dimensions, rail-mounted installation, artistic appearance, and safe operation. It has been widely used both domestically and internationally.

PZ30金属面盖金属箱体的配电箱:

- ◎ 配电系统建筑电气配电系统的电器安装, 配套以及房屋改造装修等方面。
- ◎ 采用喷塑冷轧钢板面板, 喷塑冷轧钢板箱体。
- ◎ 铁面板防刮易清洁, 箱体结实耐用防腐性。
- ◎ 箱体厚度0.8mm/1.0mm/1.2mm可选。
- ◎ 标准配置: 面板、零地排组件(上零下地)、导轨(1.0mm)、箱体。
- ◎ 可搭配断路器。

Distribution Box of PZ30 Series with Metal Cover and Metal Enclosure:

◎ Suitable for electrical installation and supporting facilities of power distribution systems in building electrical engineering, as well as house renovation and decoration.

◎ Adopts spray-painted cold-rolled steel panel and spray-painted cold-rolled steel sheet enclosure.

◎ The iron panel is scratch-resistant and easy to clean, and the enclosure is sturdy, durable and corrosion-resistant.

◎ Enclosure thickness options: 0.8mm/1.0mm/1.2mm.

◎ Standard configuration: Panel, neutral and ground busbar assembly (neutral on top, ground at the bottom), guide rail (1.0mm), enclosure.

◎ Can be equipped with circuit breakers.

暗装尺寸规格 Recessed Installation Dimension Specifications

产品型号 Model	排数 Rows	外形尺寸 Overall Dimensions	底盒尺寸 Bottom box Dimensions
LYB4-8	1	265 × 241 × 105	239 × 220 × 94
LYB4-10	1	301 × 241 × 105	275 × 220 × 94
LYB4-12	1	337 × 241 × 105	311 × 220 × 94
LYB4-15	1	391 × 241 × 105	365 × 220 × 94
LYB4-18	1	445 × 241 × 105	419 × 220 × 94
LYB4-20	1	421 × 241 × 105	455 × 220 × 94
LYB4-24/2	2	337 × 461 × 105	311 × 440 × 94
LYB4-30	2	391 × 461 × 105	365 × 440 × 94
LYB4-36	2	445 × 461 × 105	419 × 440 × 94
LYB4-40	2	481 × 461 × 105	455 × 440 × 94
LYB4-60	3	481 × 681 × 105	455 × 660 × 94

暗装尺寸规格 Recessed Installation Dimension Specifications

产品型号 Model	排数 Rows	外形尺寸 Overall Dimensions	底盒尺寸 Bottom box Dimensions
LYB4-8M	1	265 × 241 × 109	264 × 240 × 99
LYB4-10M	1	301 × 241 × 109	300 × 240 × 99
LYB4-12M	1	337 × 241 × 109	336 × 240 × 99
LYB4-15M	1	391 × 241 × 109	390 × 240 × 99
LYB4-18M	1	445 × 241 × 109	444 × 240 × 99
LYB4-20M	1	421 × 241 × 109	480 × 240 × 99
LYB4-24/2	2	337 × 461 × 109	336 × 460 × 99
LYB4-30M	2	391 × 461 × 109	390 × 460 × 99
LYB4-36M	2	445 × 461 × 109	444 × 460 × 99
LYB4-40M	2	481 × 461 × 109	480 × 460 × 99
LYB4-60M	3	481 × 681 × 109	480 × 680 × 99



LYB5系列

金属箱体住宅配电箱

LYB5系列终端配电箱，采用防火阻燃ABS，透明盖为PC，底箱为优质冷轧钢板，面板经特殊工艺处理，仿皮纹更显产品档次，彰显生活品质。

Metal Enclosure Residential Distribution Box

LYB5 Series Terminal Distribution Boxes: constructed with fire-retardant ABS material. The transparent cover is made of PC, and the bottom box is crafted from high-quality cold-rolled steel plates. The panel undergoes a special process treatment, featuring a leather-like texture that enhances the product grade and highlights the quality of life.



塑料盖金属箱体的配电箱：

- ◎配电箱建筑电气配电系统的电器安装,配套以及房屋改造装修等方面。
- ◎采用ABS阻燃面板PC磨砂可视观察窗, 喷漆冷轧钢板箱体。
- ◎翻盖观察窗设计, 可查看断路器状态, 喷漆箱体结实耐用防腐蚀。
- ◎箱体厚度0.8mm/1.0mm/1.2mm可选。
- ◎标准配置: 面板、零地排组件(左零右地)、导轨(1.0mm)、箱体。
- ◎可搭配断路器。

Distribution Box with Plastic Cover and Metal Enclosure:

◎Suitable for electrical installation and supporting facilities of power distribution systems in building electrical engineering, as well as house renovation and decoration.

◎Adopts an ABS flame-retardant panel with a PC frosted visible observation window, and a spray-painted cold-rolled steel sheet enclosure.

◎Features a flip-top observation window design, allowing for checking the status of circuit breakers; the spray-painted enclosure is sturdy, durable and corrosion-resistant.

◎Enclosure thickness options: 0.8mm/1.0mm/1.2mm.

◎Standard configuration: Panel, neutral and ground busbar assembly (neutral on the left, ground on the right), guide rail (1.0mm), enclosure.

◎Can be equipped with circuit breakers.

暗装尺寸规格 Recessed Installation Dimension Specifications

产品型号 Model	排数 Rows	外形尺寸 Overall Dimensions	底盒尺寸 Bottom box Dimensions
LYB5-9	1	240×200×95	217×180×75
LYB5-12	1	295×230×95	270×210×75
LYB5-16	1	366×230×95	340×210×75
LYB5-20	1	438×230×95	412×210×75
LYB5-24	2	295×395×95	268×375×75
LYB5-32	2	366×395×95	340×375×75
LYB5-40	2	438×395×95	412×375×75
LYB5-48	3	366×690×95	340×670×75
LYB5-60	3	438×690×95	412×670×75

明装尺寸规格 Surface Installation Dimension Specifications

产品型号 Model	排数 Rows	外形尺寸 Overall Dimensions	底盒尺寸 Bottom box Dimensions
LYB5-9M	1	240×200×95	240×200×75
LYB5-12M	1	295×230×95	295×230×75
LYB5-16M	1	366×230×95	366×230×75
LYB5-20M	1	438×230×95	438×230×75
LYB5-24M	2	295×395×95	295×395×75
LYB5-32M	2	366×395×95	366×395×75
LYB5-40M	2	438×395×95	438×395×75
LYB5-48M	3	366×690×95	366×690×75
LYB5-60M	3	438×690×95	438×690×75



LYB6系列

金属箱体住宅配电箱

别具一格，超薄豪华面板，彰显其豪华非凡之气质，用独特的设计语言雕刻属于个性的产品，内部空间宽敞，接线简单。



Metal Enclosure Residential Distribution Box

Unique in style, the ultra-thin luxury panel highlights its extraordinary luxurious demeanor. It carves a personalized product with a unique design language, featuring a spacious internal space and easy wiring.

塑料盖金属箱体的配电箱:

- ◎ 配电系统建筑电气配电系统的电器安装,配套以及房屋改造装修等方面。
- ◎ 采用ABS阻燃面板, 喷塑冷轧钢板箱体。
- ◎ 翻盖面板设计, 喷塑箱体结实耐用防腐性。
- ◎ 箱体厚度0.8mm/1.0mm/1.2mm可选。
- ◎ 标准配置: 面板、零地排组件(左零右地)、导轨(1.0mm)、箱体。
- ◎ 可搭配断路器。

Distribution Box with Plastic Cover and Metal Enclosure:

- ◎ Suitable for electrical installation and supporting facilities of power distribution systems in building electrical engineering, as well as house renovation and decoration.
- ◎ Adopts an ABS flame-retardant panel and a spray-painted cold-rolled steel sheet enclosure.
- ◎ Features a flip-top panel design; the sprayed enclosure is sturdy, durable and corrosion-resistant.
- ◎ Enclosure thickness options:0.8mm/1.0mm/1.2mm.
- ◎ Standard configuration: Panel, neutral and ground busbar assembly (neutral on the left, ground on the right),guide rail (1.0mm), enclosure.
- ◎ Can be equipped with circuit breakers.

暗装尺寸规格 Recessed Installation Dimension Specifications

产品型号 Model	排数 Rows	外形尺寸 Overall Dimensions	底盒尺寸 Bottom box Dimensions
LYB6-8	1	248×240×105	218×220×95
LYB6-12	1	320×240×105	290×220×95
LYB6-16	1	392×240×105	362×220×95
LYB6-20	1	464×240×105	434×220×95
LYB6-24	2	320×420×105	290×400×95
LYB6-32	2	392×420×105	362×400×95
LYB6-40	2	464×420×105	434×400×95
LYB6-48	3	392×600×105	362×580×95
LYB6-60	3	464×600×105	434×580×95

明装尺寸规格 Surface Installation Dimension Specifications

产品型号 Model	排数 Rows	外形尺寸 Overall Dimensions	底盒尺寸 Bottom box Dimensions
LYB6-8M	1	248×240×105	248×240×95
LYB6-12M	1	320×240×405	320×240×95
LYB6-16M	1	392×240×105	392×240×95
LYB6-20M	1	464×240×105	464×240×95
LYB6-24M	2	320×420×105	320×420×95
LYB6-32M	2	392×420×105	392×420×95
LYB6-40M	2	464×420×105	464×420×95
LYB6-48M	3	392×600×105	392×600×95
LYB6-60M	3	464×600×105	464×600×95



LYB8系列

金属箱体住宅配电箱

LYB8系列终端配电箱，金属面板象牙色、强度高。底盒为优质冷轧钢板，表面喷塑处理，不变形、不氧化、耐腐蚀，是现代楼宇工程不可或缺的产品。



Metal Enclosure Residential Distribution Box

The metal panel comes in an ivory finish and boasts high strength. The bottom box is made of high-quality cold-rolled steel plates, with a surface treated by plastic spraying—ensuring no deformation, no oxidation, and corrosion resistance. It is an indispensable product for modern building projects.

金属箱体的配电箱：

- ⊙ 配电系统建筑电气配电系统的电器安装、配套以及房屋改造装修等方面。
- ⊙ 采用喷塑冷轧钢板，喷塑冷轧钢板箱体。
- ⊙ 翻盖面板设计。
- ⊙ 箱体厚度0.8mm/1.0mm/1.2mm可选。
- ⊙ 标准配置：面板、零地排组件（左零右地）、导轨（1.0mm）、箱体。
- ⊙ 可搭配断路器。

Distribution Box with Metal Enclosure:

- ⊙ Applied in electrical installation and supporting facilities of the power distribution system for building electrical engineering, as well as house renovation and decoration.
- ⊙ Adopts electrostatically sprayed cold-rolled steel panel and electrostatically sprayed cold-rolled steel sheet enclosure.
- ⊙ Features a flip-top panel design.
- ⊙ Enclosure thickness options: 0.8mm/1.0mm/1.2mm.
- ⊙ Standard configuration: Panel, neutral and ground busbar assembly (neutral on the left, ground on the right), guide rail (1.0mm), and enclosure.
- ⊙ Can be equipped with circuit breakers.

暗装尺寸规格 Recessed Installation Dimension Specifications

产品型号 Model	排数 Rows	外形尺寸 Overall Dimensions	底盒尺寸 Bottom box Dimensions
LYB8-8	1	248×240×105	218×220×95
LYB8-10	1	284×240×105	254×220×95
LYB8-12	1	320×240×105	290×220×95
LYB8-16	1	392×240×105	362×220×95
LYB8-20	1	464×240×105	434×220×95
LYB8-24	2	320×420×105	290×400×95
LYB8-32	2	392×420×105	362×400×95
LYB8-40	2	464×420×105	434×400×95
LYB8-48	3	392×600×105	362×580×95
LYB8-60	3	464×600×105	434×580×95

明装尺寸规格 Surface Installation Dimension Specifications

产品型号 Model	排数 Rows	外形尺寸 Overall Dimensions	底盒尺寸 Bottom box Dimensions
LYB8-8M	1	248×240×105	248×240×95
LYB8-10M	1	284×240×105	284×240×95
LYB8-12M	1	320×240×105	320×240×95
LYB8-16M	1	392×240×105	392×240×95
LYB8-20M	1	464×240×105	464×240×95
LYB8-24M	2	320×420×105	320×420×95
LYB8-32M	2	392×420×105	392×420×95
LYB8-40M	2	464×420×105	464×420×95
LYB8-48M	3	392×600×105	392×600×95
LYB8-60M	3	464×600×105	464×600×95




LYB9系列

金属箱体住宅配电箱

LYB9深厚的工业设计基础艺术打造，包括纯粹、乐观和温润的触感，对生活的质量的完美追求；开启属于自己的时代

Metal Enclosure Residential Distribution Box

Crafted with a profound foundation in industrial design art, it embodies purity, optimism, and a gentle tactile experience, along with a perfect pursuit of life quality—ushering in an era that belongs to you.

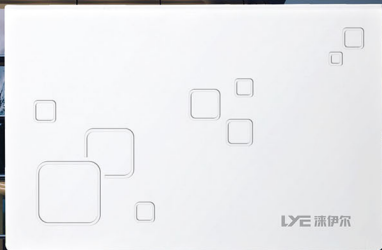

塑料盖金属箱体的配电箱：

- ◎ 配电系统建筑电气配电系统的电器安装,配套以及房屋改造装修等方面。
- ◎ 采用ABS阻燃面板, 喷塑冷轧钢板箱体。
- ◎ 翻盖面板设计, 喷塑箱体结实耐用防腐性。
- ◎ 箱体厚度0.8mm/1.0mm/1.2mm可选。
- ◎ 标准配置: 面板、零地排组件(左零右地)、导轨(1.0mm)、箱体。
- ◎ 可搭配断路器。

Distribution Box with Plastic Cover and Metal Enclosure:

◎ Suitable for electrical installation and supporting facilities of power distribution systems in building electrical engineering, as well as house renovation and decoration.

◎ Adopts an ABS flame-retardant panel and a spray-painted cold-rolled steel sheet enclosure.

◎ Features a flip-top panel design; the sprayed enclosure is sturdy, durable and corrosion-resistant.

◎ Enclosure thickness options: 0.8mm/1.0mm/1.2mm.

◎ Standard configuration: Panel, neutral and ground busbar assembly (neutral on the left, ground on the right), guide rail (1.0mm), enclosure.

◎ Can be equipped with circuit breakers.

暗装尺寸规格 Recessed Installation Dimension Specifications

产品型号 Model	排数 Rows	外形尺寸 Overall Dimensions	底盒尺寸 Bottom box Dimensions
LYB9-16	1	366×240×105	340×240×85
LYB9-20	1	438×240×105	412×240×85
LYB9-32	2	366×480×105	340×480×85
LYB9-40	2	438×480×105	412×480×85
LYB9-48	3	366×720×105	340×720×85
LYB9-60	3	438×720×105	412×720×85

明装尺寸规格 Surface Installation Dimension Specifications

产品型号 Model	排数 Rows	外形尺寸 Overall Dimensions	底盒尺寸 Bottom box Dimensions
LYB9-16M	1	366×240×105	366×220×85
LYB9-20M	1	438×240×105	438×220×85
LYB9-32M	2	366×480×105	366×460×85
LYB9-40M	2	438×480×105	438×460×85
LYB9-48M	3	366×720×105	366×700×85
LYB9-60M	3	438×720×105	438×700×85





LYM1系列

金属箱体住宅配电箱

乐享开创、生而不凡；涿伊尔隆重推出LYM1双色系住宅配电箱

细节传递人性关爱；精工成就轻奢美学。

无与伦比的黄金分割比例双色的搭配，完美的与任何风格的家
居融合，每一眼都能触动心灵。



Metal Enclosure Residential Distribution Box

Enjoy Creation, Born Extraordinary; LYE grandly launches the LYM1 Two-Color Series Residential Distribution Box. Details convey humanistic care; exquisite craftsmanship achieves light luxury aesthetics. With an unparalleled golden ratio and two-color combination, it perfectly integrates with furniture of any style, touching the heart with every glance.

塑料盖金属箱体的配电箱:

- ◎ 配电系统建筑电气配电系统的电器安装,配套以及房屋改造装修等方面。
- ◎ 采用ABS阻燃面板, 喷塑冷轧钢板箱体。
- ◎ 按压式翻盖面板设计, 喷塑箱体结实耐用防腐蚀。
- ◎ 箱体厚度0.8mm/1.0mm/1.2mm可选。
- ◎ 标准配置: 面板、零地排组件(左零右地)、导轨(1.0mm)、箱体。
- ◎ 可搭配断路器。

Distribution Box with Plastic Cover and Metal Enclosure:


- ◎ Suitable for electrical installation and supporting facilities of power distribution systems in building electrical engineering, as well as house renovation and decoration.
- ◎ Adopts an ABS flame-retardant panel and a spray-painted cold-rolled steel sheet enclosure.
- ◎ Features a push-type flip-top panel design; the spray-painted enclosure is sturdy, durable and corrosion-resistant.
- ◎ Enclosure thickness options:0.8mm/1.0mm/1.2mm.
- ◎ Standard configuration: Panel, neutral and ground busbar assembly (neutral on the left, ground on the right),guide rail(1.0mm), enclosure.
- ◎ Can be equipped with circuit breakers.

箱装尺寸规格 Recessed Installation Dimension Specifications

产品型号 Model	排数 Rows	外形尺寸 Overall Dimensions	底盒尺寸 Bottom box Dimensions
LYM1-8	1	222×210×100	195×190×85
LYM1-12	1	294×210×100	268×190×85
LYM1-16	1	366×210×100	340×190×85
LYM1-20	1	438×210×100	412×190×85
LYM1-24	2	294×335×100	268×315×85
LYM1-32	2	366×335×100	340×315×85
LYM1-40	2	438×335×100	412×315×85
LYM1-16D	1	366×230×100	340×210×85
LYM1-20D	1	438×230×100	412×210×85

明装尺寸规格 Surface Installation Dimension Specifications

产品型号 Model	排数 Rows	外形尺寸 Overall Dimensions	底盒尺寸 Bottom box Dimensions
LYM1-8M	1	222×210×100	222×210×85
LYM1-12M	1	294×210×100	294×210×85
LYM1-16M	1	366×210×100	366×210×85
LYM1-20M	1	438×210×100	438×210×85
LYM1-24M	2	294×335×100	294×335×85
LYM1-32M	2	366×335×100	366×335×85
LYM1-40M	2	438×335×100	438×335×85
LYM1-16DM	1	366×230×100	366×230×85
LYM1-20DM	1	438×230×100	438×230×85



LYM3系列

金属箱体住宅配电箱

实现新锐精英极高的居家梦想，以时尚人性化演绎现代生活享受，姿彩万千，极具前瞻魅力的时尚外在，掩不住积极进取的自信锋芒，LYM3系列，以新锐创新主流，处处彰显时尚电器专家本色。



Metal Enclosure Residential Distribution Box

It fulfills the minimalist home dreams of emerging elites, interpreting the enjoyment of modern life with fashionable humanization. Boasting a vivid array of styles and a fashion-forward exterior brimming with forward-looking charm, it cannot conceal the confident edge of proactivity. The LYM3 Series, rooted in cutting-edge innovation as the mainstream, showcases the true essence of a fashionable electrical appliance expert in every aspect.

塑料盖金属箱体的配电箱:

- ◎ 配电系统建筑电气配电系统的电器安装,配套以及房屋改造装修等方面。
- ◎ 采用ABS阻燃面板PC磨砂观察窗, 喷塑冷轧钢板箱体。
- ◎ 翻盖观察窗设计, 可查看断路器状态, 喷塑箱体结实耐用防腐蚀。
- ◎ 箱体厚度0.7mm/0.8mm/1.0mm/1.2mm可选。
- ◎ 标准配置: 面板、零地排组件(左零右地)、导轨(1.0mm)、箱体。
- ◎ 可搭配断路器。

Distribution Box with Plastic Cover and Metal Enclosure

◎ Suitable for electrical installation and supporting facilities of power distribution systems in building electrical engineering, as well as house renovation and decoration.

◎ Adopts an ABS flame-retardant panel with a PC frosted observation window, and a spray-painted cold-rolled steel sheet enclosure.

◎ Features a flip-top observation window design, which allows checking the status of circuit breakers; the spray-painted enclosure is sturdy, durable and corrosion-resistant.

◎ Enclosure thickness options: 0.7mm / 0.8mm / 1.0mm / 1.2mm.

◎ Standard configuration: Panel, neutral and ground busbar assembly (neutral on the left, ground on the right), guide rail (1.0mm), enclosure.

◎ Can be equipped with circuit breakers.

暗装尺寸规格 Recessed Installation Dimension Specifications

产品型号 Model	排数 Rows	外形尺寸 Overall Dimensions	底盒尺寸 Bottom box Dimensions
LYM3-4	1	141 × 160 × 90	120 × 143 × 75
LYM3-6	1	180 × 210 × 90	158.5 × 192 × 75
LYM3-9	1	234 × 210 × 90	212.5 × 192 × 75
LYM3-13	1	306 × 210 × 90	283.5 × 192 × 75
LYM3-16	1	360 × 210 × 90	338.5 × 192 × 75
LYM3-20	1	432 × 210 × 90	409.5 × 192 × 75
LYM3-26	2	306 × 420 × 90	283.5 × 395 × 75
LYM3-32	2	360 × 420 × 90	338.5 × 395 × 75
LYM3-40	2	432 × 420 × 90	409.5 × 395 × 75

明装尺寸规格 Surface Installation Dimension Specifications

产品型号 Model	排数 Rows	外形尺寸 Overall Dimensions	底盒尺寸 Bottom box Dimensions
LYM3-4M	1	141 × 160 × 90	141 × 160 × 75
LYM3-6M	1	180 × 210 × 90	180 × 210 × 75
LYM3-9M	1	234 × 210 × 90	234 × 210 × 75
LYM3-13M	1	306 × 210 × 90	306 × 210 × 75
LYM3-16M	1	360 × 210 × 90	360 × 210 × 75
LYM3-20M	1	432 × 210 × 90	432 × 210 × 75
LYM3-26M	2	306 × 420 × 90	306 × 420 × 75
LYM3-32M	2	360 × 420 × 90	360 × 420 × 75
LYM3-40M	2	432 × 420 × 90	432 × 420 × 75



LYM5系列

金属箱体住宅配电箱

科技日新月异，对布线的要求也一样。任何布线系统必须要有前瞻性，即能满足现状，又必须考虑到未来的发展，这就是我们LYM5系列的研发重点。

Metal Enclosure Residential Distribution Box

Technology is advancing by leaps and bounds, and the same goes for the requirements for wiring. Any wiring system must be forward-looking—it should not only meet current needs but also take future development into account. This is the core focus of our LYM5 Series R&D.



塑料面盖金属箱体的配电箱:

- ① 配电系统建筑电气配电系统的电器安装, 配套以及房屋改造装修等方面。
- ② 金属箱体与塑料面盖相配合, 特别适用于建筑, 装修工程中配电箱采用的暗装方式。
- ③ 时尚的外形设计适合出现于高级住宅, 酒店与办公楼等彰显现代生活品位的场所。

3C GB17466.1、GB17466.24的

Distribution Box with Plastic Cover and Metal Enclosure:

① Suitable for electrical installation and supporting facilities of power distribution systems in building electrical engineering, as well as house renovation and decoration.

② The metal cabinet combined with the plastic cover is especially suitable for the recessed installation of distribution boxes in construction and decoration projects.

③ Its stylish appearance design is suitable for high-end residences, hotels, office buildings and other venues that highlight modern lifestyle tastes.

④ The product has taken the lead in obtaining 3C Certification and complies with the standards of GB17466.1 and GB17466.24.

暗装尺寸规格 Recessed Installation Dimension Specifications

产品型号 Model	排数 Rows	外形尺寸 Overall Dimensions	底盒尺寸 Bottom box Dimensions
LYM5-10	1	267×228×100	247×210×85
LYM5-12	1	305×228×100	285×210×85
LYM5-15	1	359×250×100	339×230×85
LYM5-18	1	412×250×100	392×230×85
LYM5-21	1	467×250×100	447×230×85
LYM5-24/1	1	521×250×100	501×230×85
LYM5-24/2	2	305×399×100	285×370×85
LYM5-30	2	359×429×100	339×400×85
LYM5-36	2	412×429×100	392×400×85

明装尺寸规格 Surface Installation Dimension Specifications

产品型号 Model	排数 Rows	外形尺寸 Overall Dimensions	底盒尺寸 Bottom box Dimensions
LYM5-10M	1	267×228×100	267×228×85
LYM5-12M	1	305×228×100	305×228×85
LYM5-15M	1	359×250×100	359×250×85
LYM5-18M	1	412×250×100	412×250×85
LYM5-21M	1	467×250×100	467×250×85
LYM5-24/1M	1	521×250×100	521×250×85
LYM5-24/2M	2	305×399×100	305×399×85
LYM5-30M	2	359×429×100	359×429×85
LYM5-36M	2	412×429×100	412×429×85



LYC1系列

户外配电箱

符合现代美学的样式，
莱伊尔电气为能提供时尚和流线型家用产品感到自豪

Outdoor Distribution Box

Boasting a design that aligns with modern aesthetics, LYE Electric takes pride in offering household products that are both stylish and streamlined.



全塑暗装配电箱：

- ①采用ABS阻燃面板和箱体。
- ②翻盖观察窗设计，可查看断路器状态。
- ③标准配置：面板、零地排组件、导轨、箱体。
- ④可搭配断路器。

Full-Plastic Recessed Mount Distribution Box

- ①Adopts an ABS flame-retardant panel and an ABS flame-retardant enclosure.
- ②Features a flip-top observation window design, allowing for checking the status of circuit breakers.
- ③Standard configuration: Panel, neutral and ground busbar assembly, guide rail, enclosure.
- ④Can be equipped with circuit breakers.

产品型号 Model	外形尺寸 Overall Dimensions
LYC1-3	138×94×83
LYC1-4	138×112×83
LYC1-5	138×130×83
LYC1-6	180×190×88
LYC1-9	233×190×88
LYC1-13	305×190×88
LYC1-18	395×190×88
LYC1-26	303×345×88
LYC1-36	410×345×88



LYC2系列

IP65防水等级户外配电箱

符合现代美学的样式，

涑伊尔电气为能提供时尚和流线型家用产品感到自豪。



IP65 Waterproof Rating Outdoor Distribution Box

Boasting a design that aligns with modern aesthetics, LYE Electric takes pride in offering household products that are both stylish and streamlined.

全塑户外HT防水盒：

- ①适用于停车场、养殖场等室外场景。
- ②采用ABS阻燃面板和箱体，PC透明面盖。
- ③翻盖观察窗设计，IP65防水等级，同时可防尘。
- ④标准配置：面板、零地排组件、导轨、箱体。
- ⑤可搭配断路器。

Full-Plastic Outdoor HT Waterproof Box

- ①Suitable for outdoor scenarios such as parking lots and breeding farms.
- ②Adopts an ABS flame-retardant panel, an ABS flame-retardant enclosure, and a PC transparent cover.
- ③Features a flip-top observation window design, with an IP65 waterproof rating and dustproof performance.
- ④Standard configuration: Panel, neutral and ground busbar assembly, guide rail (1.0mm), enclosure.
- ⑤Can be equipped with circuit breakers.

产品型号 Model	外形尺寸 Overall Dimensions
LYC2-5	129×170×95
LYC2-8	183×170×95
LYC2-12	255×200×105
LYC2-15	309×200×105
LYC2-18	363×200×110
LYC2-24	270×360×110





LYC3系列

IP65防水等级户外配电箱

符合现代美学的样式，

莱伊尔电气为能提供时尚和流线型家用产品感到自豪

IP65 Waterproof Rating Outdoor Distribution Box

Boasting a design that aligns with modern aesthetics, LYE Electric takes pride in offering household products that are both stylish and streamlined.

全塑户外HA防水盒：

- ①适用于停车场、养殖场等室外场景。
- ②采用ABS阻燃面板和箱体，PC透明面盖。
- ③翻盖观察窗设计，IP65防水等级，同时可防尘。
- ④标准配置：面板、零地排组件、导轨、箱体。
- ⑤可搭配断路器。

Full-Plastic Outdoor HA Waterproof Box

- ①Suitable for outdoor scenarios such as parking lots and breeding farms.
- ②Adopts an ABS flame-retardant panel, an ABS flame-retardant enclosure, and a PC transparent cover.
- ③Features a flip-top observation window design, with an IP65 waterproof rating and dustproof performance.
- ④Standard configuration: Panel, neutral and ground busbar assembly, guide rail, enclosure.
- ⑤Can be equipped with circuit breakers.

产品型号 Model	外形尺寸 Overall Dimensions
LYC3-4	107×205×100
LYC3-6	165×200×100
LYC3-9	220×200×100
LYC3-12	273×230×110
LYC3-18	381×230×110
LYC3-24	273×379×110
LYC3-36	273×529×110



LYC4系列

户外配电箱

符合现代美学的样式，
沫伊尔电气为能提供时尚和流线型家用产品感到自豪



Outdoor Distribution Box

Boasting a design that aligns with modern aesthetics, LYE Electric takes pride in offering household products that are both stylish and streamlined.

全塑明装配电箱：

- ①明装配电箱适用于停车场、养殖场等室外场景。
- ②采用ABS阻燃面板和箱体，PC观察窗。
- ③翻盖观察设计。
- ④标准配置：面板、零地排组件、导轨、箱体。
- ⑤可搭配断路器。

Full-Plastic Surface-Mounted Distribution Box

- ①The surface-mounted distribution box is suitable for outdoor scenarios such as parking lots and breeding farms.
- ②Adopts an ABS flame-retardant panel, an ABS flame-retardant enclosure, and a PC observation window.
- ③Features a flip-top observation design.
- ④Standard configuration: Panel, neutral and ground busbar assembly, guide rail, enclosure.
- ⑤Can be equipped with circuit breakers.

产品型号 Model	外形尺寸 Overall Dimensions
LYC4-4	135×155×88
LYC4-8	235×207×88
LYC4-12	307×207×88
LYC4-16	380×260×88
LYC4-20	455×215×88





LYC5系列

全塑不锈钢扣合页电气盒

符合现代美学的样式，

淡伊尔电气为您提供时尚和流线型家用产品感到自豪

Full-Plastic Electrical Box with Stainless Steel Latch Hinge

Boasting a design that aligns with modern aesthetics, LYE Electric takes pride in offering household products that are both stylish and streamlined.

全塑不锈钢扣合页电气盒：

- ①适用于防水、防尘、防腐蚀等特殊场景。
- ②透明A款采用PC面板和ABS箱体，不透明AB款采用ABS面板和箱体。
- ③防水等级：IP66。
- ④标准配置：面板、箱体不锈钢扣合页（可换塑料合页）。
- ⑤可搭配断路器。

Full-Plastic Electrical Box with Stainless Steel Latch Hinges

- ①Suitable for special scenarios requiring waterproof, dustproof and corrosion-resistant performance.
- ②For the transparent Type A: Adopts a PC panel and an ABS enclosure; for the opaque Type AB: Adopts an ABS panel and an ABS enclosure.
- ③Waterproof rating: IP66.
- ④Standard configuration: Panel, enclosure, and stainless steel latch hinges (plastic hinges are replaceable).
- ⑤Can be equipped with circuit breakers.

产品型号 Model	外形尺寸 Overall Dimensions
LYC5-151007	150×100×70
LYC5-151509	150×150×90
LYC5-201007	200×100×70
LYC5-201011	200×100×110
LYC5-221711	220×170×110
LYC5-221211	225×125×110
LYC5-261610	260×160×100
LYC5-291914	290×190×140
LYC5-333313	330×330×130
LYC5-352515	350×250×150
LYC5-413118	410×310×180
LYC5-514120	510×410×200





LYD1系列

金属箱体住宅配电箱

符合现代美学的样式，
徕伊尔电气为能提供时尚和流线型家用产品感到自豪

Metal Enclosure Residential Distribution Box

Boasting a design that aligns with modern aesthetics, LYE Electric takes pride in offering household products that are both stylish and streamlined.

单相与三相金属面盖金属箱体的配电箱

- ① 单相系列适用于单相电路，广泛用于住宅区域。三相系列适用于三相电路，用于保护工业区域的机器。
- ② ABS和喷塑冷轧钢板、喷塑冷轧钢箱体
- ③ 紧凑型配电箱，占用空间最小。
- ④ 标准配置：面板、零地排、导轨（1.0mm）、箱体。
- ⑤ 颜色：棕色、绿色。
- ⑥ 可搭配断路器。

Single-Phase and Three-Phase Distribution Box with Metal Cover and Metal Enclosure

- ① The single-phase series is suitable for single-phase circuits and widely used in residential areas. The three-phase series is suitable for three-phase circuits and used for protecting machinery in industrial areas.
- ② Available with ABS panel or spray-painted cold-rolled steel panel, and equipped with a spray-painted cold-rolled steel enclosure.
- ③ It is a compact distribution box, occupying minimal space.
- ④ Standard configuration: Panel, neutral and ground busbars, guide rail (1.0mm), enclosure.
- ⑤ Color options: Brown, Green.
- ⑥ Can be equipped with circuit breakers.

产品型号	外形尺寸	底盒尺寸
Model	Overall Dimensions	Bottom box Dimensions
LYD1-8	270×250×95	250×220×85
LYD1-12	342×250×95	322×220×85
LYD1-18	450×250×95	430×220×85
LYD1-24	270×450×95	250×420×85
LYD1-36/2	450×450×95	430×420×85
LYD1-36/3	270×650×95	250×620×85



LYD2系列

金属箱体住宅配电箱

符合现代美学的样式，

洙伊尔电气为能提供时尚和流线型家用产品感到自豪



Metal Enclosure Residential Distribution Box

Boasting a design that aligns with modern aesthetics, LYE Electric takes pride in offering household products that are both stylish and streamlined.

金属面盖金属箱体的配电箱：

- ① 喷塑冷轧钢板和亚克力观察窗、喷塑冷轧钢箱体。
- ② 标准配置：面板、零地排、导轨（1.0mm）、箱体。
- ③ 箱体厚度：0.7mm/0.8mm/1.0mm/1.2mm可选。
- ④ 可搭配断路器。

Distribution Box with Metal Cover and Metal Enclosure

- ① Adopts a spray-painted cold-rolled steel panel with an acrylic observation window, and a spray-painted cold-rolled steel enclosure.
- ② Standard configuration: Panel, neutral and ground busbars, guide rail (1.0mm), enclosure.
- ③ Enclosure thickness options: 0.7mm/0.8mm/1.0mm/1.2mm.
- ④ Can be equipped with circuit breakers.

产品型号	外形尺寸	底盒尺寸
Model	Overall Dimensions	Bottom box Dimensions
LYD2-8	260×250×90	240×230×80
LYD2-12	330×250×90	310×230×80
LYD2-16	410×250×90	390×230×80
LYD2-24	330×390×90	310×370×80



LYD5系列

金属箱体住宅配电箱

符合现代美学的样式。

洙伊尔电气为能提供时尚和流线型家用产品感到自豪

Metal Enclosure Residential Distribution Box

Boasting a design that aligns with modern aesthetics, LYE Electric takes pride in offering household products that are both stylish and streamlined.



金属面盖金属箱体的配电箱：

- 喷塑冷轧钢板、喷塑冷轧钢箱体。
- 配有活动式金属门，便于观察内部状态。
- 标准配置：面板、零地排、导轨（1.0mm）、箱体。
- 箱体厚度0.8mm/1.0mm/1.2mm可选。
- 可搭配断路器。

Distribution Box with Metal Cover and Metal Enclosure

- Adopts a spray-painted cold-rolled steel panel and a spray-painted cold-rolled steel enclosure.
- Equipped with a movable metal door, which facilitates checking the internal status.
- Standard configuration: Panel, neutral and ground busbars, guide rail (1.0mm), enclosure.
- Enclosure thickness options: 0.8mm/1.0mm/1.2mm.
- Can be equipped with circuit breakers.

产品型号 Model	外形尺寸 Overall Dimensions	底盒尺寸 Bottom box Dimensions
LYD5-4	189×240×85	169×220×65
LYD5-6	225×240×85	205×220×65
LYD5-8	261×240×85	241×220×65
LYD5-10	297×240×85	277×220×65
LYD5-12	333×240×85	313×220×65
LYD5-14	370×240×85	350×220×65



LYX1-01系列

智能家具多媒体信息箱

符合现代美学的样式，
沫伊尔电气为能提供时尚和流线型家用产品感到自豪

Smart Home Multimedia Information Box

Boasting a design that aligns with modern aesthetics, LYE Electric takes pride in offering household products that are both stylish and streamlined.



塑料面板金属箱体的多媒体模块箱：

- ①采用ABS面板，喷漆冷轧钢板箱体。
- ②面板散热设计，喷漆箱体结实耐用防腐蚀。
- ③箱体厚度0.8mm/1.0mm/1.2mm可选。
- ④标准配置：面板、塑料四孔支架、简易猫架、两位五孔排插、箱体。
- ⑤内部配置可自行任意搭配：

模块支架：塑料四孔支架、喷漆四孔支架、喷漆七孔支架

猫架：简易猫架、小猫架、大猫架

- ⑥可搭配电视电话模块、电源模块等。

Multimedia Module Box with Plastic Panel and Metal Enclosure

①Adopts an ABS panel and a spray-painted cold-rolled steel sheet enclosure.

②The panel is designed with heat dissipation functionality; the spray-painted enclosure is sturdy, durable and corrosion-resistant.

③Enclosure thickness options:0.8mm/1.0mm/1.2mm.

④Standard configuration:Panel, plastic 4-hole bracket, simple router shelf, dual 5-hole power strip, enclosure.

⑤Internal configurations can be freely combined as needed:

Module brackets: Plastic four-hole bracket, spray-painted four-hole bracket, spray-painted seven-hole bracket.

Cable management racks: Simple cable management rack, small cable management rack, large cable management rack.

⑥Can be equipped with TV and telephone modules, power modules, etc.



支架
bracket

排插
power strip

猫架
cable management rack

产品型号	外形尺寸	底盒尺寸
Model	Overall Dimensions	Bottom box Dimensions
LYX1-01	425×325×140	400×300×120



(塑料支架+排插+简易猫架)
Plastic Bracket + Power Strip + Simple Cable Management Rack



(喷漆七孔支架+排插+简易猫架)
Spray-Painted Seven-Hole Bracket + Power Strip + Simple Cable Management Rack



(喷漆七孔支架+排插+小猫架)
Spray-Painted Seven-Hole Bracket + Power Strip + Small Cable Management Rack



(喷漆七孔支架+排插+大猫架)
Spray-Painted Seven-Hole Bracket + Power Strip + Large Cable Management Rack

LYX1-02视界系列

玻璃面板智能家居多媒体信息箱

为每一处细节注入灵魂，濠伊尔创新大平面玻璃面板信息箱；艺术家的澎湃激情之作，致力于再现纯粹的质感结合前沿科技，在自然中吸取灵感，让每一眼定格，享受精彩纷呈的温馨生活。

Glass Panel Smart Home Multimedia Information Box

Soul is infused into every detail - LYE innovates the large-flat glass panel information box. A masterpiece born from the passionate inspiration of artists, it is committed to recreating pure texture combined with cutting-edge technology. Drawing inspiration from nature, it freezes every stunning glance, allowing you to enjoy a vibrant and warm life.



玻璃面板金属箱体的多媒体入户信息箱：

- ①采用钢化玻璃面板，喷塑冷轧钢板箱体
- ②玻璃面板防刮易清洁，箱体结实耐用防腐蚀。
- ③箱体厚度0.8mm/1.0mm/1.2mm可选。
- ④皓月白、星空灰多色可选，也可定制其他颜色。
- ⑤标准配置：面板、喷塑七孔支架、大猫架、两位五孔排插、箱体。
- ⑥可搭配电视电话模块、电源模块等。

Multimedia Entry Information Box with Glass Panel and Metal Enclosure

- ①Adopts a tempered glass panel and a spray-painted cold-rolled steel sheet enclosure.
- ②The glass panel is scratch-resistant and easy to clean, while the enclosure is sturdy, durable and corrosion-resistant.
- ③Enclosure thickness options: 0.8mm/1.0mm/1.2mm.
- ④Multiple color options available: Bright Moon White, Starry Sky Gray; other colors can also be customized.
- ⑤Standard configuration: Panel, spray-painted seven-hole bracket, large cable management rack, two-position five-hole power strip, enclosure.
- ⑥Can be equipped with TV and telephone modules, power modules, etc.



支架
bracket



排插
power strip



猫架
cable management rack

产品型号 Model	外形尺寸 Overall Dimensions	底盒尺寸 Bottom box Dimensions
LYX1-02	430×330×140	400×300×120
LYX1-02H	430×330×140	400×300×120



LYX1-03系列

智能家居多媒体信息箱

创新、前沿的科技产品，享受温馨的未来。科技日新月异，对布线的要求也一样。任何布线系统必须要有前瞻性，即能满足现状，又必须考虑到未来的发展，这就是我们LYX1系列的研发重点。

Smart Home Multimedia Information Box

As an innovative and cutting-edge technological product, it lets you enjoy a warm future. Technology is advancing by leaps and bounds, and the requirements for wiring are no different. Any wiring system must be forward-looking—it should not only meet current needs but also take future development into account. This is the core focus of our LYX1 Series R&D.



塑料面板金属箱体的多媒体模块箱：

- ①采用ABS面板，喷漆冷轧钢板箱体。
- ②紧凑型模块箱，占用空间最小。
- ③箱体厚度0.8mm/1.0mm/1.2mm可选。
- ④标准配置：面板、喷漆七孔支架、箱体。
- ⑤可搭配电视电话模块、电源模块等。

Multimedia Module Box with Plastic Panel and Meta Enclosure

- ①Adopts an ABS panel and a spray-painted cold-rolled steel sheet enclosure.
- ②It is a compact module box, occupying minimal space
- ③Enclosure thickness options: 0.8mm/1.0mm/1.2mm.
- ④Standard configuration: Panel, spray-painted seven-hole bracket, enclosure.
- ⑤Can be equipped with TV and telephone modules, power modules, etc.

产品型号 Model	外形尺寸 Overall Dimensions	底盒尺寸 Bottom box Dimensions
LYX1-03AX	320×225×120	300×200×100



LYX1-06系列

智能家具多媒体信息箱

符合现代美学的样式，
涑伊尔电气为您提供时尚和流线型家用产品感到自豪。



Smart Home Multimedia Information Box

Boasting a design that aligns with modern aesthetics, LYE Electric takes pride in offering household products that are both stylish and streamlined.

塑料面板金属箱体的多媒体模块箱：

- ①采用ABS面板，喷漆冷轧钢板箱体。
- ②面板全白设计，简约又大气，喷漆箱体结实耐用防腐蚀。
- ③箱体厚度0.8mm/1.0mm/1.2mm可选。
- ④标准配置：面板、塑料四孔支架、简易猫架、两位五孔排插、箱体。
- ⑤内部配置可自行任意搭配：

模块支架：塑料四孔支架、喷漆四孔支架、喷漆七孔支架

猫架：简易猫架、小猫架、大猫架

- ⑥可搭配电视电话模块、电源模块等。

Multimedia Module Box with Plastic Panel and Metal Enclosure

①Adopts an ABS panel and a spray-painted cold-rolled steel sheet enclosure.

②The panel features an all-white design, which is simple and elegant; the spray-painted enclosure is sturdy, durable and corrosion-resistant.

③Enclosure thickness options: 0.8mm/1.0mm/1.2mm.

④Standard configuration: Panel, plastic 4-hole bracket, simple router shelf, dual 5-hole power strip, enclosure.

⑤Internal configurations can be freely combined as needed:

Module brackets: Plastic four-hole bracket, spray-painted four-hole bracket, spray-painted seven-hole bracket.

Cable management racks: Simple cable management rack, small cable management rack, large cable management rack.

⑥Can be equipped with TV and telephone modules, power modules, etc.



支架
bracket

排插
power strip

猫架
cable management rack

产品型号	外形尺寸	底盒尺寸
Model	Overall Dimensions	Bottom box Dimensions
LYX1-06	425×325×140	400×300×120



(塑料支架+排插+简易猫架)

Plastic Bracket + Power Strip + Simple Cable Management Rack



(喷漆七孔支架+排插+简易猫架)

Spray-Painted Seven-Hole Bracket + Power Strip + Simple Cable Management Rack



(喷漆七孔支架+排插+小猫架)

Spray-Painted Seven-Hole Bracket + Power Strip + Small Cable Management Rack



(喷漆七孔支架+排插+大猫架)

Spray-Painted Seven-Hole Bracket + Power Strip + Large Cable Management Rack



LYX1-08系列

光纤入户箱

在光纤箱出现以前，计划、实施和管理一个住宅布线系统，通常都会一片混乱，有了光纤箱这个网络中心的概念，所有的设备增加，功能取消和修改都变得轻而易举，更改具体某个端口的应用途径不再是一场灾难。

Fiber Optic Entry Box

Before the advent of fiber optic boxes, planning, implementing, and managing a residential wiring system was usually chaotic. With the concept of the fiber optic box as a network hub, all device additions, function cancellations, and modifications have become effortless, and changing the application method of a specific port is no longer a disaster.

塑料面板金属箱体的多媒体模块箱：

- ①采用ABS面板，喷漆冷轧钢板箱体。
- ②面板散热设计，喷漆箱体结实耐用防腐蚀。
- ③箱体多尺寸可选，满足您多场景需求。
- ④箱体厚度0.8mm/1.0mm/1.2mm可选。
- ⑤标准配置：面板、塑料四孔支架、简易猫架、两位五孔排插、箱体。
- ⑥内部配置可自行任意搭配：

模块支架：塑料四孔支架、喷漆四孔支架、喷漆七孔支架

猫架：简易猫架、小猫架、大猫架

- ⑦可搭配电视电话模块、电源模块等。

Multimedia Module Box with Plastic Panel and Metal Enclosure

- ①Adopts an ABS panel and a spray-painted cold-rolled steel sheet enclosure.

②The panel is designed with heat dissipation functionality; the spray-painted enclosure is sturdy, durable and corrosion-resistant.

③Multiple enclosure sizes are available to meet your requirements in various scenarios.

④Enclosure thickness options:0.8mm/1.0mm/1.2mm.

⑤Standard configuration:Panel, plastic four-hole bracket, simple router shelf, dual 5-hole power strip, enclosure.

⑥Internal configurations can be freely combined as needed:

Module brackets: Plastic four-hole bracket, spray-painted four-hole bracket, spray-painted seven-holebracket.

Cable management racks: Simple cable management rack, small cable management rack, large cable management rack.

- ⑦Can be equipped with TV and telephone modules, power modules, etc.



支架
bracket



排插
power strip



猫架
cable management rack

外型型号 Model	外形尺寸 Overall Dimensions	底盒尺寸 Bottom box Dimensions
LYX1-08B	325×275×140	300×250×120
LYX1-08C	375×325×140	350×300×120
LYX1-08D	425×325×140	400×300×120
LYX1-08E	525×425×140	500×400×120



(塑料支架+排插+简易猫架)
Plastic Bracket + Power Strip + Simple Cable Management Rack



(喷漆七孔支架+排插+简易猫架)
Spray-Painted Seven-Hole Bracket + Power Strip + Simple Cable Management Rack



(喷漆七孔支架+排插+小猫架)
Spray-Painted Seven-Hole Bracket + Power Strip + Small Cable Management Rack



(喷漆七孔支架+排插+大猫架)
Spray-Painted Seven-Hole Bracket + Power Strip + Large Cable Management Rack



LYX2-08系列

光纤入户箱

常用于智能家居布线，家庭局域网，家电智能化等工程项目中。光纤入户在接入网上实现Internet宽带接入、有线电视广播(CATV)接入和IP电话三网合一，可以完全取代HFC的C-M接入方式；超高带宽，是ADSL的100倍。

电话：IP电话和普通电话可选；(IATV与数字电视和高清晰电视完全兼容。

Fiber Optic Entry Box

It is commonly used in engineering projects such as smart home wiring, home local area networks (LANs), and home appliance intelligentization. Fiber-to-the-home (FTTH) enables the triple-play integration of Internet broadband access, cable television (CATV) broadcasting access, and IP telephony on the access network, which can completely replace the Cable Modem (CM) access method of Hybrid Fiber-Coaxial (HFC) networks. It features ultra-high bandwidth, which is 100 times that of ADSL.

Telephone: IP telephony and traditional telephony are optional; Internet Protocol Television (IPTV) is fully compatible with digital television and high-definition television (HDTV).

金属面板金属箱体的多媒体模块箱：

- ①采用喷塑冷轧钢板面板，喷塑冷轧钢板箱体。
- ②面板散热设计，喷塑箱体结实耐用防腐蚀。
- ③箱体多尺寸可选，满足您多场景需求。
- ④箱体厚度0.8mm/1.0mm/1.2mm可选。
- ⑤标准配置：面板、喷塑七孔支架、小猫架、两位五孔排插、箱体。
- ⑥内部配置可自行任意搭配：

模块支架：塑料四孔支架、喷塑四孔支架、喷塑七孔支架

猫架：简易猫架、小猫架、大猫架

- ⑦可搭配电视电话模块、电源模块等。

Multimedia Module Box with Metal Panel and Metal Enclosure

①Adopts a spray-painted cold-rolled steel panel and a spray-painted cold-rolled steel sheet enclosure.

②The panel is designed with heat dissipation functionality; the spray-painted enclosure is sturdy, durable and corrosion-resistant.

③Multiple enclosure sizes are available to meet your requirements in various scenarios.

④Enclosure thickness options:0.8mm/1.0mm/1.2mm.

⑤Standard configuration: Panel, spray-painted seven-hole bracket, small cable management rack, two-position five-hole power strip, enclosure.

⑥Internal configurations can be freely combined as needed:

Module brackets: Plastic four-hole bracket, spray-painted four-hole bracket, spray-painted seven-holebracket.

Cable management racks: Simple cable management rack, small cable management rack, large cable management rack.

⑦Can be equipped with TV and telephone modules, power modules, etc.



支架
bracket



排插
power strip



猫架
cable management rack

产品型号 Model	外形尺寸 Overall Dimensions	底盒尺寸 Bottom box Dimensions
LYX2-08B	330×280×140	300×250×120
LYX2-08C	380×330×140	350×300×120
LYX2-08D	430×330×140	400×300×120
LYX2-08E	480×330×140	450×300×120
LYX2-08F	530×330×140	500×300×120
LYX2-08G	530×430×140	500×400×120

LYX1-09系列

光纤入户箱

轻奢智能家居光纤箱，探索生活中不曾发现的美。在每一个重要时刻，以简约灵动的匠心赋予智能科技时尚与精致的魅力；营造只属于您的生活空间和品位。

Fiber Optic Entry Box

Explore the unseen beauty in life. At every important moment, the minimalist and flexible craftsmanship endows smart technology with the charm of fashion and delicacy; creating a living space and taste that belong exclusively to you.



塑料面板金属箱体的多媒体模块箱：

- ◎采用ABS面板，喷漆冷轧钢板箱体。
- ◎面板方型散热孔设计，喷漆箱体结实耐用防腐蚀。
- ◎箱体厚度0.8mm/1.0mm/1.2mm可选。
- ◎标准配置：面板、塑料四孔支架、简易猫架、两位五孔排插、箱体。
- ◎内部配置可自行任意搭配：

模块支架：塑料四孔支架、喷漆四孔支架、喷漆七孔支架

猫架：简易猫架、小猫架、大猫架

- ◎可搭配电视电话模块、电源模块等。

Multimedia Module Box with Plastic Panel and Metal Enclosure

◎Adopts an ABS panel and a spray-painted cold-rolled steel sheet enclosure.

◎The panel is designed with square heat dissipation holes; the spray-painted enclosure is sturdy, durable and corrosion-resistant.

◎Enclosure thickness options:0.8mm/1.0mm/1.2mm.

◎Standard configuration: Panel, plastic 4-hole bracket, simple router shelf, dual 5-hole power strip, enclosure.

◎Internal configurations can be freely combined as needed:

Module brackets: Plastic four-hole bracket, spray-painted four-hole bracket, spray-painted seven-hole bracket.

Cable management racks: Simple cable management rack, small cable management rack, large cable management rack.

◎Can be equipped with TV and telephone modules, power modules, etc.



支架
bracket

排插
power strip

猫架
cable management rack

产品型号 Model	外形尺寸 Overall Dimensions	底盒尺寸 Bottom box Dimensions
LYX1-09D	425×325×140	400×300×120



(塑料支架+排插+简易猫架)

Plastic Bracket + Power Strip + Simple Cable Management Rack



(喷漆七孔支架+排插+简易猫架)

Spray-Painted Seven-Hole Bracket + Power Strip + Simple Cable Management Rack



(喷漆七孔支架+排插+小猫架)

Spray-Painted Seven-Hole Bracket + Power Strip + Small Cable Management Rack



(喷漆七孔支架+排插+大猫架)

Spray-Painted Seven-Hole Bracket + Power Strip + Large Cable Management Rack



LYTD28等电位

金属箱体等电位

金属箱体等电位配电箱，通过专业等电位连接技术，消除触电风险，搭配金属箱体的强防护性能，提供不间断的安全守护。

Metal Enclosure Equipotential Box

Equipotential Distribution Box with Metal Cabinet: Through professional equipotential bonding technology, it eliminates the risk of electric shock. Combined with the strong protective performance of the metal cabinet, it provides continuous safety protection.

金属箱体等电位

- 采用喷塑冷轧钢板箱体。
- 厚实板材，箱体坚硬，喷塑工艺防锈防腐。
- 内置黄铜导流条。

Metal Enclosure Equipotential Box

- Adopts a spray-painted cold-rolled steel sheet enclosure.
- Features thick plate material, ensuring a rigid enclosure, the spray-painting process provides rust and corrosion resistance.
- Built-in brass current guide bar.

产品型号 Model	明装外形尺寸 Surface-Mounted Overall Dimensions	暗装外形尺寸 Recessed-Mounted Overall Dimensions	底盒尺寸 Bottom box Dimensions
LYTD28-S	165×80×51	180×95×51	160×75×50
LYTD28-L	305×204×101	320×220×101	300×200×100





LYW-AP101系列 面板型Wi-Fi

面板型Wi-Fi无线路由器产品系列，是莱伊尔科技推出的无线通讯新产品，在传统Wi-Fi产品的基础上进行微型化设计和软硬件升级，有效解决了局域网终端信号衰减等问题，墙壁嵌入式设计、简单的安装模式，更加符合现代办公、家庭、酒店、娱乐的智能化需求。

- 中国第一家面板型W-F无线路由器方案供应商
- 美国高通全球合作伙伴
- 节能、低频、快速率、高覆盖、零辐射、绿色网络倡导者
- 全面升级无线快乐生活，畅游互联网世界
- 集设计、研发、生产、销售为一体的高科技企业



LYW-AP101 Series Panel-Type WiFi

As a new wireless communication product launched by Laiyier Technology, the panel-type WiFi wireless router product series features miniaturized design and software-hardware upgrades based on traditional WiFi products. It effectively solves problems such as signal attenuation of LAN terminals. With a wall-embedded design and simple installation mode, it is more in line with the intelligent needs of modern offices, homes, hotels and entertainment venues.

- The first supplier of panel-type WiFi wireless router solutions in China
- Global partner of Qualcomm (USA)
- Advocate of energy-saving, low-frequency, high-speed, wide-coverage, zero-radiation and green networks
- Comprehensively upgrade the happy wireless life and enjoy a smooth experience in the Internet world
- A high-tech enterprise integrating design, R&D, production and sales

LYW-AP101系列 LYW-AP101 Series

无线宽带路由器 Panel-Type Wireless Router

LYW-AP101/LYW-AP111系列墙壁嵌入式300MWi-Fi无线宽带路由器是深伊尔科技有线/无线网络连接器于一体, 包括一个以太网上行接口用于接入Internet和一个以太网设备端LAN, 还带有802的无线接口, 支持300Mbps无线传输速率, 在提供有线客户端接入的同时允许支持802.11b/g/无线客户端接入, 组网更灵活, 使用更方便。LYW-AP有两种产品形态, 一种直接220V交流电供电, 安装时需要预留市电和网络接口, 一种POE供电, 安装时需要配合POE供电模块, 只要预留网络接口。

标准接线面板86×86结构设计, 可方便快捷的安装在墙盒内, 简洁美观; 丰富多样的接入方式; 方便快捷的管理维护; 丰富的软件;

LYW-AP101/LYW-AP111 Series Wall-Embedded 300M WiFi Wireless Broadband Router. Developed by LYETechnology, this router integrates wired and wireless network connectivity. It includes one Ethernet uplink port for Internet access, one Ethernet LAN port for device connection, and a wireless interface compliant with the 802

standard. Supporting a wireless transmission rate of 300Mbps, it enables access for wired clients while allowing connections from wireless clients that support the 802.11b/g standards—delivering more flexible networking and easier usage. The LYW-AP series is available in two versions: One version is powered by direct 220V AC. For installation, a mains power interface and a network interface need to be pre-installed. The other version uses PoE (Power over Ethernet) power supply. Its installation requires matching with a PoE power module, and only a network cable interface needs to be pre-installed.

Adopts a standard 86×86 wiring panel structure, allowing easy and quick installation in wall boxes with a neat and elegant appearance.

Offers diverse and flexible access methods.

Enables convenient and efficient management and maintenance.

Comes with a rich set of software functions.

产品型号 Model 产品配置及功能 Specs & Functions

LYW-AP101
面板式无线路由器
LYW-AP101
Panel-Type
Wireless Router

嵌入传统墙壁开关86暗盒内;
11N无线技术, 300Mbps无线速率
安装方便, 无需配置, 家装更加美观简洁;
良好的兼容智能手机, 平板电脑, 笔记本, 上网本等;
支持AP无线接入点 Repeater (无线中继), Router (无线路由), Bridge (无线桥接)等工作模式提供 LAN/WAN有线接座;
非标准POE供电。

Fits into traditional 86-type wall switch junction boxes;
11N wireless technology, 300Mbps wireless speed
Easy to install, no configuration required, making home decoration more elegant and concise;
Excellent compatibility with smartphones, tablets, laptops, netbooks, etc.;;
Supports working modes such as AP (Wireless Access Point), Repeater (Wireless Repeater), Router (Wireless Router), Bridge (Wireless Bridge), and provides LAN/WAN wired ports with strong electric power supply.



LYW-AP111
面板式无线路由器
LYW-AP111
Panel-Type
Wireless Router

嵌入传统墙壁开关86暗盒内;
11N无线技术, 300Mbps无线速率
安装方便, 无需配置, 家装更加美观简洁;
良好的兼容智能手机, 平板电脑, 笔记本, 上网本等;
支持AP无线接入点, Repeater (无线中继), Router (无线路由), Bridge (无线桥接)等工作模式提供 LAN/WAN有线接座;
强电供电。

Fits into traditional 86-type wall switch junction boxes;
11N wireless technology, 300Mbps wireless speed
Easy to install, no configuration required, making home decoration more elegant and concise;
Excellent compatibility with smartphones, tablets, laptops, netbooks, etc.;;
Supports working modes such as AP (Wireless Access Point), Repeater (Wireless Repeater), Router (Wireless Router), Bridge (Wireless Bridge), and provides LAN/WAN wired ports with strong electric power supply.



AP模式

默认工作模式, 该模式下设备是一个无线接入点, 支持即插即用, 无需配置。

Router模式

该模式下设备就相当于一个无线路由器, 有线接口作为WAN, 无线为WLAN, 多个无线客户端可以共享一个宽带线路上网。

Repeater模式

利用设备的无线接力功能, 实现无线信号的中继和放大, 并形成新的无线覆盖区域, 最终达到延伸无线网络的覆盖范围的目的。

Bridge模式

利用设备是桥接功能, 首先YW-AP与前端无线网络建立无线连接, 然后自身发出无线信号, 形成新的无线覆盖范围, 可以有效解决信号弱以及信号盲点等无线覆盖问题。

Client模式在此模式下工作的AP对于主AP来说是无线客户端, 相当于无线路由。

AP Mode

As the default working mode, the device functions as a wireless access point in this mode. It supports plug-and-play and requires no configuration.

Router Mode

In this mode, the device works like a wireless router: the wired port serves as WAN (Wide Area Network), and the wireless function acts as WLAN (Wireless Local Area Network). Multiple wireless clients can share a single broadband connection to access the Internet.

Repeater Mode

This mode leverages the device's wireless relay function to realize the relaying and amplification of wireless signals, forming a new wireless coverage area. Ultimately, it achieves the goal of extending the coverage range of the wireless network.

Bridge Mode

Using the device's bridge function, the YW-AP first establishes a wireless connection with the front-end wireless network, then emits its own wireless signal to form a new wireless coverage range. This effectively solves wireless coverage issues such as weak signals and signal blind spots.

Client Mode

In this mode, the AP operating as a Client acts as a wireless client for the main AP, equivalent to a wireless network adapter.



LYX系列 光纤箱模块 LYX Series Fiber Optic Box Modules






产品型号 Model	产品配置及功能 Specs & Functions		
LYX-B301 POE路由模块 LYX-B301 POE Routing Module	1个WAN口(10/100Mbps) 4个LAN口(10/100Mbps) 4个LAN口均带POE功能 POE为非标12V供电	1 WAN port (10/100Mbps) 4 LAN ports (10/100Mbps) All 4 LAN ports feature POE functionality POE uses non-standard 12V power supply	
LYX-B302 POE路由模块 LYX-B302 POE Routing Module	1个WAN口(10/100Mbps) 8个LAN口(10/100Mbps) 其中4个LAN口带POE功能 POE为非标12V供电	1 WAN port (10/100Mbps) 8 LAN ports (10/100Mbps) 4 of the LAN ports feature POE functionality POE uses non-standard 12V power supply	
LYX-B307 POE交换机模块 LYX-B307 POE Switch Module	1个上行口(10/100Mbps) 4个LAN口(10/100Mbps) 4个LAN口均带POE功能 POE为非标12V供电	1 Upstream Port (10/100Mbps) 4 LAN ports (10/100Mbps) All 4 LAN ports feature POE functionality POE uses non-standard 12V power supply	
LYX-B308 POE交换机模块 LYX-B308 POE Switch Module	1个上行口(10/100Mbps) 8个LAN口(10/100Mbps) 8个LAN口均带POE功能 POE为非标12V供电	1 Upstream Port (10/100Mbps) 8 LAN ports (10/100Mbps) All 8 LAN ports feature POE functionality POE uses non-standard 12V power supply	

LYX系列

信息箱模块

LYX Series Information box module

产品型号 Model	产品配置及功能 Specs & Functions	
LYX-A301 电话模块 LYX-A301 Telephone Module	1进4出电话模块 1-in-4-out telephone module	
LYX-A304 电话模块 LYX-A304 Telephone Module	1进7出电话模块 1-in-7-out telephone module	
LYX-B305 数据模块 LYX-B305 Data Module	1进4出电脑模块 (无交换功能) 1-in-4-out computer module (No Switch Function)	
LYX-C301 有线电视信号模块 LYX-C301 CATV signal module	1进4出电视模块 1-in-4-out TV module	
LYX-C302 有线电视信号模块 LYX-C302 CATV signal module	1进6出电视模块 1-in-6-out TV module	
LYX-C303 电视电话一体模块 LYX-C303 TV-telephone integrated module	1进4出电话+1进4出电视模块 1-in-4-out telephone module+1-in-4-out TV module	

产品型号 Model	产品配置及功能 Specs & Functions	
LYX-E301 开关电源模块 LYX-E301 Switching Power Supply Module	电源模块 12V/24V1A供电(可选) Power Module 12V/24V 1A Power Supply (Optional)	
LYX-G301 填充模块 LYX-G301 Filler Module	1U填充模块 1U Filler Module	
LYX-G302 填充模块 LYX-G302 Filler Module	2U填充模块 2U Filler Module	
LYX-FS1	风扇模块 Fan Module	
LYP1-020	排插模块 Power Strip Module	



涑伊尔科技(浙江)股份有限公司
LYE TECHNOLOGY (ZHEJIANG) CO., LTD.

地址Add: 浙江省温州市洞头区霓盛路1190号
电话Tel: 0577-61710288
Http://www.cnlye.com

